


**TECHNICAL FEATURES PRODUCT**

**PRODUCT CURRENT TRANSFORMER TRM 30 WGS**

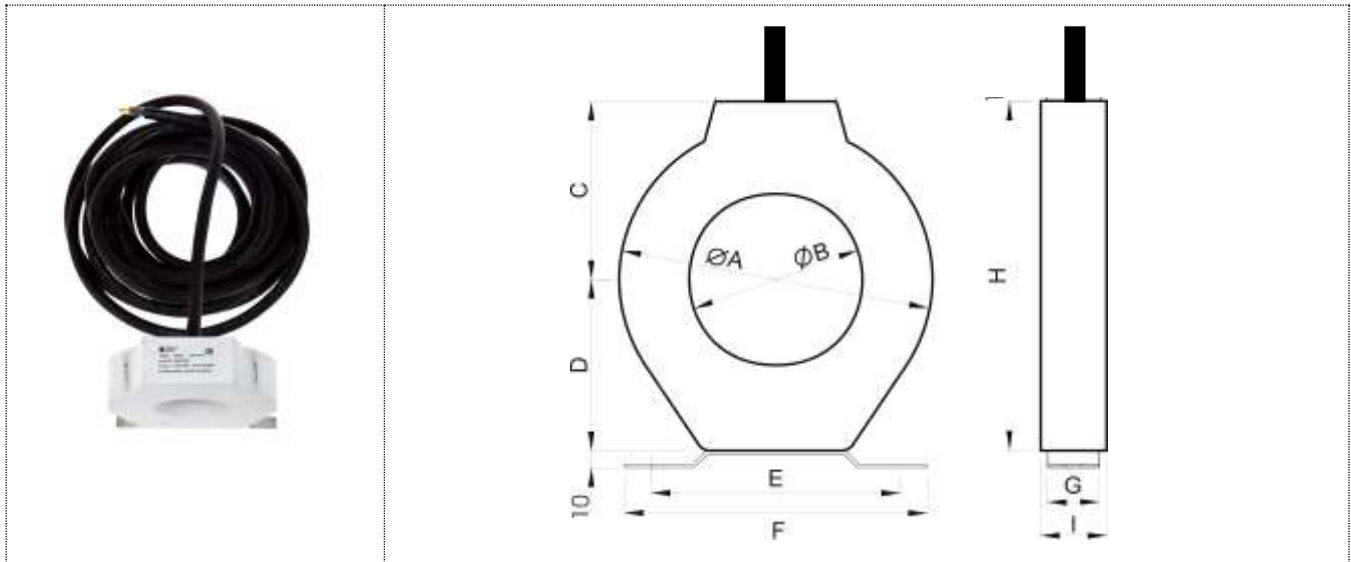

<b>DESCRIPTION</b>	Current Transformer for earth
<b>SECONDARY OUTPUT</b>	Cable RC4V-K (shielded) 7 m. two wires $\varnothing 1,5 \text{ mm}^2$ and UV resistant.
<b>INNER WINDOW</b>	Cable $\varnothing 30 \text{ mm}$
<b>RESIN C CASE</b>	Enclosure of self-extinguishing VO,synthetic resin.
<b>COLOUR</b>	Outdoor applications C-THANE S258. Grey colour
<b>MARKED</b>	Plate of characteristics. Label in grey poliéster 38X26 mm
<b>ACCESORIES</b>	Stainless steel mounting brackets.
<b>PACKED</b>	Cardbord Box
<b>STANDARD</b>	I.E.C. 61869-2

<b>RATIO CURRENT TRANSFORMER</b>	500/ 1A
<b>RATED BURDEN</b>	480 m $\Omega$
<b>ACCURACY CLASS</b>	$\pm 5\%$
<b>HIGHEST VOLTAGE FOR EQUIPMENT (Um)</b>	720 V <sub>ac</sub>
<b>DIELECTRIC TEST VOLTAGE</b>	3 kV during 1 minute
<b>RATED SHORT-TIME THERMAL CURRENT</b>	$I_{th} = 60 \cdot I_n$
<b>RATED DINAMIC CURRENT</b>	$I_{dyn} = 2.5 \cdot I_{th}$
<b>FREQUENCY RANGE</b>	50 – 60 Hz
<b>THERMAL CLASS</b>	B(130 °C)

CODE	DESCRIPTION	DIMENSIONS (mm)										WHEIGHT (Kg.)
		A	B	C	D	E	F	G	H	I		
P5000864FX902	TRM30 WGS	105	30	63	60	98	110	30	123	36	1,2	

REDACTADO	16/11/2015	Earth leakage TRANSFORMERS	SUSTITUYE
VERIFICADO	16/11/2015		SUSTITUIDO POR